



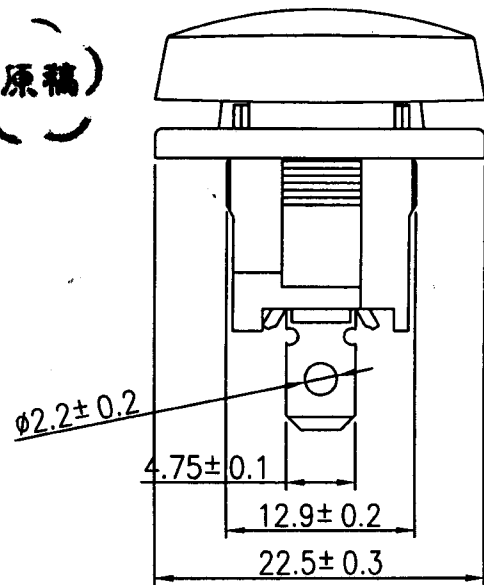
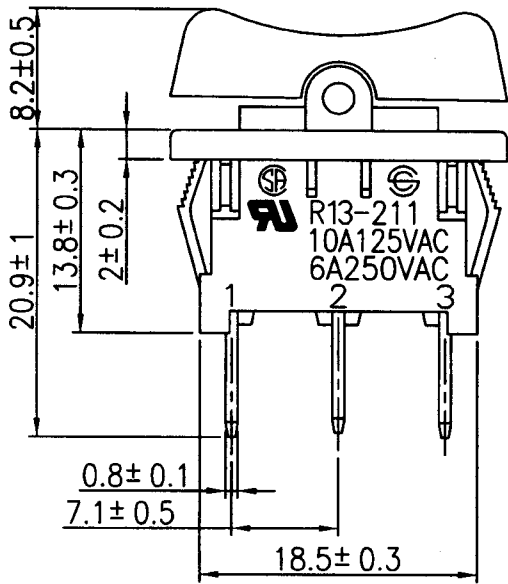


Rating	10A 125V,6A 250V AC 	Mounting Hole	Circuit Diagram											
Contact R	50m ohm Max.													
Insulation R	DC 500V 100M ohm Min.													
Dielectric Strength	AC 1500V 1 minute													
Operation Temperature	-20°C~85°C													
Circuit	3P SPDT ON-OFF-ON	<table border="1"> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75...1.25</td> <td>19.2-0.1</td> <td>13+0.1</td> </tr> <tr> <td>1.25...2.0</td> <td>19.4-0.1</td> <td>13+0.1</td> </tr> <tr> <td>2.0...3.0</td> <td>19.8-0.1</td> <td>13+0.1</td> </tr> </table>	Thickness	X	Y	0.75...1.25	19.2-0.1	13+0.1	1.25...2.0	19.4-0.1	13+0.1	2.0...3.0	19.8-0.1	13+0.1
Thickness	X	Y												
0.75...1.25	19.2-0.1	13+0.1												
1.25...2.0	19.4-0.1	13+0.1												
2.0...3.0	19.8-0.1	13+0.1												






Descriptions:

Frame: Black, Nylon-66 (94V-2)
 Actuator: Black, Nylon-66 (94V-2)
 Terminals: Silver plated copper
 Printed: White, 10 11



C8\R13\R13-211D-02(ON-OFF-DOOR)

						△		
						△		
Date		Name		Descriptions				NO
Drawing	Check	Approval	SCI No.	1821029	Model Name	ROCKER SWITCH		
徐洲迎			Customer No.		Model No.	R13-211D-02-BBNN-6		
7/11/'06	8/28-'06		Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.			